

ALMMH LT 16

Lighting Towers



Prime Power

Refers to the main power supply, working under 70% average load for unlimited time. 10% overloading is allowed.

Stand-by Power

Refers to the back up power supplied to the varying load for a limited time. Overloading is not allowed.


Lighting Tower

		Prime	Stand-by
Power	kVA	14,5	16
Power	kW	11,6	12,8
Model Name		ALMMH LT 16	
Engine Brand		Mitsubishi	
Engine Model		S4L2	
Fuel Type		Dizel	
Fuel Tank Capacity	lt	115	
Fuel Consumption (100%)	lt/h	5	

The images used are for representation purposes. Alimar reserves the right to make changes to models, technical specifications, color, equipment, accessories, and images without prior notice.

ALMMH LT 16

Lighting Towers

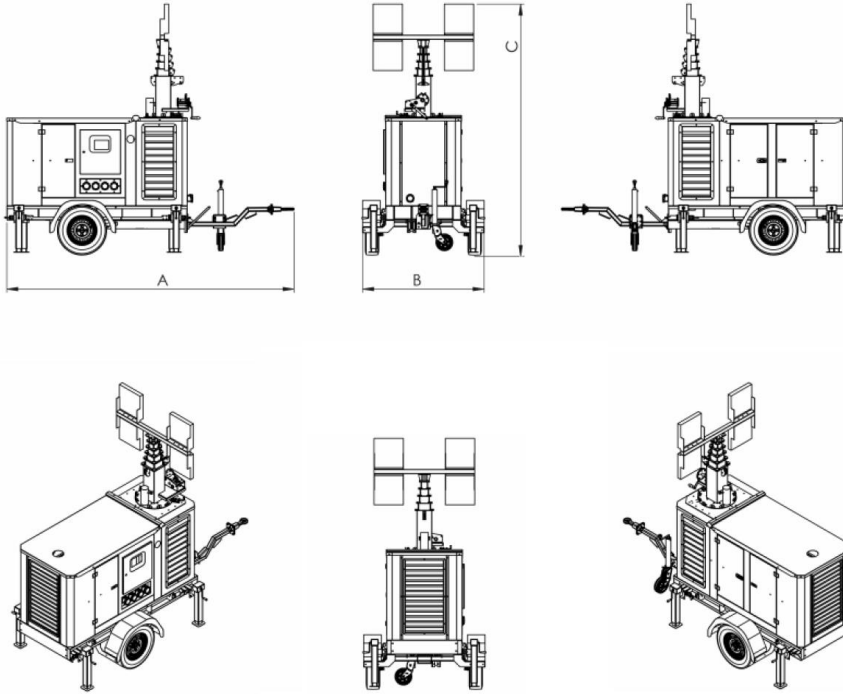

Dimensions – A x B x Y	mm	3275 x 1450 x 3015
Tower Height	m	7 - 9
Number of Cylinders		4
Stroke	mm	92
Bore	mm	78
Oil Capacity	lt	6
Electrical System	VDC	12
RPM	rpm	1500
Number of Phases		3
Plug (Output)		5x32A/400VAC , 3x16A/230VAC
Plug (Input/Grid/Internal requirement)		5x32A/400VAC
Armature Power Factor		>0,95
Armature Protection Class		IP 65-66
LED Armature Power	W	4x150/300/400
LED Armature Lumen (300W/400W)	lm	31.500/42.000
Metal Halide Armature Power	W	4x1000
Metal Halide Armature Lumen	lm	100.000
Max. Wind Speed	km/s	60

The images used are for representation purposes. Alimar reserves the right to make changes to models, technical specifications, color, equipment, accessories, and images without prior notice.

ALMMH LT16

Lighting Towers

Control Module



ALM929

ALM 929 is a next generation genset controller combining multi-functionality and wide communication capabilities together with a reliable and low-cost design. The same controller provides AMF, ATS, Remote Start, Engine Control and Remote Display Panel functionalities.

- Stand-by and prime-power application in one unit
 - Multi languages functionality
 - 3 level of passwords
 - 16Amp MCB & GCB outputs
 - 4 analog inputs, 8 binary inputs, 8 binary outputs
 - ECU Support
 - 4 slots for plug-in modules
 - Adjustable delay for binary inputs
 - Fuel pump control
 - Real time clock
 - Multi-purpose scheduler functionality maintenance timers
 - Alarms and gen-set status assignable to binary outputs
 - Disable protections feature
 - Detailed history log records
 - Modbus register mapping possibility
 - -20 / +70 C operating temperature
 - IP65 rating with standard gasket
- Communications
- Ethernet port *
 - GSM-GPRS *
 - RS-485 *
 - USB
 - J1939-CANBUS
- * Optional with plug-in module



AMF 9

Intelilite NT AMF 9 Control Module

Protection Functions

- Overvoltage
- Low voltage
- Voltage asymmetry and phase sequence
- High frequency
- Low frequency
- Short-circuit current
- Overcurrent
- Power factor
- Coolant temperature
- Low oil pressure

Auto Panel Features

- Automatic generator, grid control and fault monitoring
- Easy control with a user-friendly interface from the panel screen
- Remote operation with optional communication cards
- Manual programming with password-protected service interface
- Manual control of generator and transfer panel with buttons on the front panel
- Front panel protection class IP65
- With an operating temperature of -20 C to +70 C and a storage temperature of -40 C to +80 C

The images used are for representation purposes. Alimar reserves the right to make changes to models, technical specifications, color, equipment, accessories, and images without prior notice.